

Windows and patio doors with geared handle

Additional stay arm
K-12964-00-0-1

Stay arm
Size 30, 50, 90

Locking plate
6-30959-**-0-1

Corner transmission
6-30889-**-0-1

Corner transmission
6-24529-00-0-1
Locking plate
6-30959-**-0-1

Carrier
6-30984-00-0-1
Locking plate
6-30959-**-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Geared handle SPACIO
G-46551-96-0-*
WOSD
6-31065-40-0-1

Tilt locking plate
6-30964-**-0-1
Shoot bolt, bottom
6-24531-00-0-1
Corner transmission
6-30889-**-0-1

Supporting plate
6-31066-00-0-1

Wedge for sash
9-40404-00-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Fitting requirements according to size of sashes for schemes A to E

Quantity					Description	PU	Article No.
A	B	C	D	E			
1	1	1	1	1	Geared handle SPACIO [1] hole centre distance 104 mm – incl. screws	10	G-46551-96-0-*
1	1	1	1	1	Wrong operation safety device (WOSD) hole centre distance 104 mm	100	6-31065-40-0-1
Box of stay arm JET AK 8							
SW Size							
1	1				355- 700 30	10	K-15805-00-0-1
1	1				701-1000 50	10	K-15806-00-0-1
1	1	1	1		1001-1400 90	10	K-15807-00-0-1
			1		1401-1700 50	10	K-15806-00-0-1
			1		1401-1700 Additional stay arm	10	K-12964-00-0-1
1	1	1	1	1	Bag of locking parts JET AK 8 for geared handle	10	K-15801-00-0-1
Contents							
1 Corner transmission							6-24529-00-0-1
1 Carrier							6-30984-00-0-1
1 Shoot bolt, bottom							6-24531-00-0-1
1 Supporting plate							6-31066-00-0-1
1 Wedge for sash							9-40404-00-0-1
1	1	2	2		Bag of middle lock [2]	10	K-15808-00-0-1
Contents							
1 Corner transmission [3]							6-30889-00-0-1
1 Locking pin element							6-24539-00-0-1
alternatively for deepened rod groove							
Bag of middle lock [2]						10	K-15809-00-0-1
Contents							
1 Corner transmission [4]							6-30889-01-0-1
1 Locking pin element							6-24539-00-0-1
1	1	1	1	1	Tilt locking plate	100	6-30964-00-0-1
1	3	3	5	5	Locking plate	100	6-30959-00-0-1
alternatively for + 0,7 mm gasket pressure							
Tilt locking plate						100	6-30964-01-0-1
Locking plate						100	6-30959-01-0-1

[1] * = Colour: 0 = uncoated, 1 = F 1/EV 1, 5 = UC 5, 6 = black (RAL 9005),
7 = white (RAL 9016), 7T = white (RAL 9010)


[2] Middle lock from SW or SH 1200 mm

[3] Groove depth max. 3,9 mm or groove width max. 13 mm

[4] Groove depth 4,0 to 5,1 mm

Working drawing 0-44170

Windows and patio doors with mill-in gear



2

Additional stay arm
K-12964-00-0-1

Stay arm
Size 30, 50, 90

Locking plate
6-30959-**-0-1

Corner transmission
6-30889-**-0-1

Corner transmission
6-24529-00-0-1
Locking plate
6-30959-**-0-1

Mill-in gear
6-30534-00-0-1

Handle DIRIGENT-F
6-28072-25-0-*
Countersunk screws M 5 x 30
9-13255-30-0-1

Tilt locking plate
6-30964-**-0-1
Shoot bolt, bottom
6-24531-00-0-1
Corner transmission
6-30889-**-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Fitting requirements according to size of sashes for schemes A to E

Quantity					Description	PU	Article No.
A	B	C	D	E			
1	1	1	1	1	Handle DIRIGENT-F [1]	20	6-28072-25-0-*
2	2	2	2	2	Countersunk screw M 5 x 30	400	9-13255-30-0-1
Box of stay arm JET AK 8							
SW						Size	
1	1				355- 700	30	K-15805-00-0-1
1	1				701-1000	50	K-15806-00-0-1
1	1	1	1		1001-1400	90	K-15807-00-0-1
				1	1401-1700	50	K-15806-00-0-1
				1	1401-1700 Additional stay arm	10	K-12964-00-0-1
1	1	1	1	1	Bag of locking parts JET AK 8 with mill-in gear	10	K-15811-00-0-1
Contents							
1 Corner transmission							6-24529-00-0-1
1 Mill-in gear with wrong operation safety device (WOSD)							6-30534-00-0-1
1 Shoot bolt, bottom							6-24531-00-0-1
1 Supporting plate							6-31066-00-0-1
1 Wedge for sash							9-40404-00-0-1
1	1	2	2		Bag of middle lock [2]	10	K-15808-00-0-1
Contents							
1 Corner transmission [3]							6-30889-00-0-1
1 Locking pin element							6-24539-00-0-1
alternatively for deepened rod groove							
Bag of middle lock [2]						10	K-15809-00-0-1
Contents							
1 Corner transmission [4]							6-30889-01-0-1
1 Locking pin element							6-24539-00-0-1
1	1	1	1	1	Tilt locking plate	100	6-30964-00-0-1
1	2	2	4	4	Locking plate	100	6-30959-00-0-1
alternatively for + 0,7 mm gasket pressure							
Tilt locking plate						100	6-30964-01-0-1
Locking plate						100	6-30959-01-0-1

[1] * = Colour: 11 = F 1/EV 1, 22 = F 2/EV 2, 3 = F 3, A = F 4, 5 = dark brown (RAL 8022), 7 = white (RAL 9016), C = titanium colour

[2] Middle lock from SW or SH 1200 mm

[3] Groove depth max. 3,9 mm or groove width max. 13 mm

[4] Groove depth 4,0 to 5,1 mm

Working drawings 0-44170

Supporting plate
6-31066-00-0-1

Wedge for sash
9-40404-00-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Windows and patio doors with geared handle

Additional stay arm
G-46145-00-0-1

Stay arm FT
Size 30, 50, 90

Locking plate
6-30959-**-0-1

Corner transmission
6-30889-**-0-1

Corner transmission
6-24529-00-0-1
Locking plate
6-30959-**-0-1

Carrier
6-30984-00-0-1
Locking plate
6-30959-**-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Geared handle SPACIO FT
G-46557-96-**-*

Tilt locking plate FT
6-332287-00-0-1
Shoot bolt FT, bottom
G-17648-00-0-1
Corner transmission
6-30889-**-0-1

Wedge for frame
6-30998-00-0-1

Wedge for sash
9-40404-00-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Fitting requirements according to size of sashes for schemes A to E

Quantity					Description	PU	Article No.
A	B	C	D	E			
1	1	1	1	1	Geared handle SPACIO FT [1]	10	G-46557-96-L-*
					hole centre distance 104 mm,	10	G-46557-96-R-*
					lockable – incl. screws		
1	1	1	1	1	Wrong operation safety device (WOSD)	100	6-31065-40-0-1
					hole centre distance 104 mm		
					Box of stay arm JET AK 8 FT		
					SW Size		
1	1				355- 700 30	10	K-16671-00-0-1
1	1				701-1000 50	10	K-16672-00-0-1
1	1	1	1		1001-1400 90	10	K-16673-00-0-1
				1	1401-1700 50	10	K-16672-00-0-1
				1	1401-1700 Additional stay arm	10	G-46145-00-0-1
1	1	1	1	1	Bag of locking parts JET AK 8 FT	10	K-17057-00-0-1
					for geared handle		
					Contents		
					1 Corner transmission		6-24529-00-0-1
					1 Carrier		6-30984-00-0-1
					1 Shoot bolt FT, bottom		G-17648-00-0-1
					1 Tilt locking plate FT		6-332287-00-0-1
					1 Wedge for frame		6-30998-00-0-1
					1 Wedge for sash		9-40404-00-0-1
1	1	2	2		Bag of middle lock [2]	10	K-15808-00-0-1
					Contents		
					1 Corner transmission [3]		6-30889-00-0-1
					1 Locking pin element		6-24539-00-0-1
					alternatively for deepened rod groove		
					Bag of middle lock [2]	10	K-15809-00-0-1
					Contents		
					1 Corner transmission [4]		6-30889-01-0-1
					1 Locking pin element		6-24539-00-0-1
1	3	3	5	5	Locking plate	100	6-30959-00-0-1
					alternatively for + 0,7 mm gasket pressure		
					Locking plate	100	6-30959-01-0-1

[1] * = Colour: 0 = uncoated, 1 = F 1/EV 1, 5 = UC 5, 6 = black (RAL 9005),
7 = white (RAL 9016), 7T = white (RAL 9010)


[2] Middle lock from SW or SH 1200 mm

[3] Groove depth max. 3,9 mm or groove width max. 13 mm

[4] Groove depth 4,0 to 5,1 mm

Working drawing 0-44529

Windows and patio doors with mill-in gear



2

Additional stay arm
G-46145-00-0-1

Stay arm FT
Size 30, 50, 90

Locking plate
6-30959-**-0-1

Corner transmission
6-30889-**-0-1

Corner transmission
6-24529-00-0-1
Locking plate
6-30959-**-0-1

Mill-in gear
6-30534-00-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Fitting requirements according to size of sashes for schemes A to E

Quantity					Description	PU	Article No.
A	B	C	D	E			
1	1	1	1	1	Handle DIRIGENT-F FT [1] lockable	20	6-31557-29-0-*
2	2	2	2	2	Countersunk screw M 5 x 30	400	9-13255-30-0-1
Box of stay arm JET AK 8 FT							
Size							
1	1				355- 700 30	10	K-16671-00-0-1
1	1				701-1000 50	10	K-16672-00-0-1
1	1	1	1		1001-1400 90	10	K-16673-00-0-1
				1	1401-1700 50	10	K-16672-00-0-1
				1	1401-1700 Additional stay arm	10	G-46145-00-0-1
1	1	1	1	1	Bag of locking parts JET AK 8 FT with mill-in gear	10	K-17058-00-0-1
Contents							
1 Corner transmission						6-24529-00-0-1	
1 Mill-in gear						6-30534-00-0-1	
1 Shoot bolt FT, bottom						G-17648-00-0-1	
1 Tilt locking plate FT						6-32287-00-0-1	
1 Wedge for frame						6-30998-00-0-1	
1 Wedge for sash						9-40404-00-0-1	
1	1	2	2		Bag of middle lock [2]	10	K-15808-00-0-1
Contents							
1 Corner transmission [3]						6-30889-00-0-1	
1 Locking pin element						6-24539-00-0-1	
alternatively for deepened rod groove							
Bag of middle lock [2]						10	K-15809-00-0-1
Contents							
1 Corner transmission [4]						6-30889-01-0-1	
1 Locking pin element						6-24539-00-0-1	
1	2	2	4	4	Locking plate	100	6-30959-00-0-1
alternatively for + 0,7 mm gasket pressure							
Locking plate						100	6-30959-01-0-1

[1] * = Colour: 11 = F 1/EV 1, 22 = F 2/EV 2, 3 = F 3, A = F 4, 5 = dark brown (RAL 8022), 7 = white (RAL 9016), C = titanium colour

[2] Middle lock from SW or SH 1200 mm

[3] Groove depth max. 3,9 mm or groove width max. 13 mm

[4] Groove depth 4,0 to 5,1 mm

Working drawing 0-44529

Handle DIRIGENT-F FT
6-31557-29-0-*

Countersunk screws M 5 x 30
9-13255-30-0-1


Tilt locking plate FT
6-32287-00-0-1
Shoot bolt FT, bottom
G-17648-00-0-1
Corner transmission
6-30889-**-0-1

Wedge for frame
6-30998-00-0-1

Wedge for sash
9-40404-00-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Windows and patio doors with geared handle



Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Corner transmission
6-24529-00-0-1
Locking plate
6-30959-**-0-1

Carrier
6-30984-00-0-1
Locking plate
6-30959-**-0-1

Geared handle SPACIO
G-46551-96-0-*
Fixing plate
9-41506-00-0-8
Countersunk screws

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Wedge for sash
9-40404-00-0-1

Wedge for frame
6-30998-00-0-1

Wedge for frame
6-30998-00-0-1

Tilt locking plate
6-30964-**-0-1
Shoot bolt, bottom
6-24531-00-0-1
Corner transmission
6-30889-**-0-1

Fitting requirements according to size of sashes for schemes A to D

Quantity				Description	PU	Article No.
A	B	C	D			
1	1	1	1	Geared handle SPACIO [1] hole centre distance 104 mm – with screws	10	G-46551-96-0-*
1	1	1	1	Fixing plate hole centre distance 104 mm	50	9-41506-00-0-8
1	1	1	1	Bag of locking parts DF JET AK 8 for geared handle Contents	10	K-15802-00-0-1
				1 Carrier		6-30984-00-0-1
				2 Locking pin elements		6-24539-00-0-1
				1 Wedge for frame		6-30998-00-0-1
				1 Wedge for sash		9-40404-00-0-1
				Additional parts for middle lock [2]		
	1	1		Corner transmission	100	6-24529-00-0-1
	1	1		Shoot bolt, bottom	100	6-24531-00-0-1
	1	1		Corner transmission [3]	100	6-30889-00-0-1
				alternatively for deepened rod groove Corner transmission [4]	100	6-30889-01-0-1
	2	3	1	Tilt locking plate	100	6-30964-00-0-1
			4	Locking plate	100	6-30959-00-0-1
				alternatively for + 0,7 mm gasket pressure		
				Tilt locking plate	100	6-30964-01-0-1
				Locking plate	100	6-30959-01-0-1

[1] * = Colour: 0 = uncoated, 1 = F 1/EV 1, 5 = UC 5, 6 = black (RAL 9005),
7 = white (RAL 9016), 7T = white (RAL 9010)


[2] Middle lock from SW 1200 mm

[3] Groove depth max. 3,9 mm or groove width max. 13 mm

[4] Groove depth 4,0 to 5,1 mm

Working drawing 0-44231

Windows and patio doors with mill-in gear



2

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Corner transmission
6-24529-00-0-1
Locking plate
6-30959-**-0-1

Mill-in gear
6-31280-00-0-1

Handle DIRIGENT-F
6-28072-25-0-*
Countersunk screws M 5 x 30
9-13255-30-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Tilt locking plate
6-30964-**-0-1
Shoot bolt, bottom
6-24531-00-0-1
Corner transmission
6-30889-**-0-1

Wedge for sash
9-40404-00-0-1

Wedge for frame
6-30998-00-0-1

Wedge for frame
6-30998-00-0-1

Locking pin element
6-24539-00-0-1
Locking plate
6-30959-**-0-1

Fitting requirements according to size of sashes for schemes A and C

Quantity	Description	PU	Article No.
A	C		
1	1	Handle DIRIGENT-F [1]	20 6-28072-25-0-*
2	2	Countersunk screw M 5 x 30	400 9-13255-30-0-1
1	1	Bag of locking parts DF JET AK 8 with mill-in gear	10 K-15812-00-0-1
		Contents	
		1 Mill-in gear	6-31280-00-0-1
		2 Locking pin elements	6-24539-00-0-1
		1 Wedge for frame	6-30998-00-0-1
		1 Wedge for sash	9-40404-00-0-1
		Additional parts for middle lock [2]	
	1	Corner transmission	100 6-24529-00-0-1
	1	Shoot bolt, bottom	100 6-24531-00-0-1
	1	Corner transmission [3]	100 6-30889-00-0-1
		alternatively for deepened rod groove	
		Corner transmission [4]	100 6-30889-01-0-1
2	1	Tilt locking plate	100 6-30964-00-0-1
	3	Locking plate	100 6-30959-00-0-1
		alternatively for + 0,7 mm gasket pressure	
		Tilt locking plate	100 6-30964-01-0-1
		Locking plate	100 6-30959-01-0-1

[1] * = Colour: 11 = F 1/EV 1, 22 = F 2/EV 2, 3 = F 3, A = F 4, 5 = dark brown (RAL 8022), 7 = white (RAL 9016), C = titanium colour

[2] Middle lock from SW 1200 mm

[3] Groove depth max. 3,9 mm or groove width max. 13 mm

[4] Groove depth 4,0 to 5,1 mm


Working drawing 0-44231

Windows and patio doors with inactive sash gear or shoot bolts – false mullion profile with single groove



Locking plate
6-30959-**-0-1
Locking pin element
6-24539-00-0-1

Locking plate
6-30959-**-0-1
Locking pin element
6-24539-00-0-1

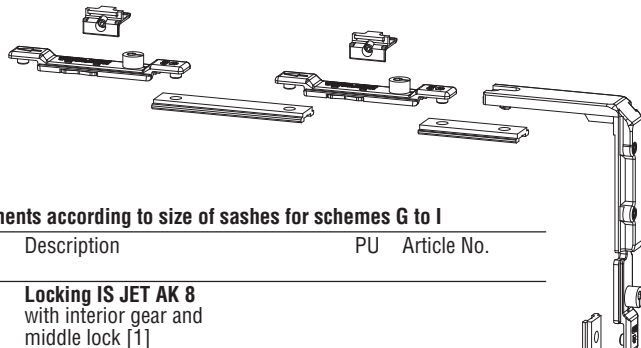

Corner transmission
6-24529-00-0-1

Locking plate for
inactive sash
6-30961-00-0-1

Shoot bolt
G-17509-00-0-1

Locking plate for
inactive sash
6-30961-00-0-1

Keeper
G-12096-00-0-1
Shoot bolt
E-12832-00-0-1
Carrier screw
9-40884-30-0-8

Fitting requirements according to size of sashes for schemes G to I


Quantity G H I	Description	PU	Article No.
	Locking IS JET AK 8 with interior gear and middle lock [1]		
1	Inactive sash gear	100	6-24680-00-0-1
1	Key	100	6-23903-38-0-0
1	Corner transmission	100	6-24529-00-0-1
1	Shoot bolt	100	6-24531-00-0-1
3	Locking pin elements	100	6-24539-00-0-1
1	Corner transmission [2]	100	6-30889-00-0-1
	alternatively for deepened rod groove Corner transmission [3]	100	6-30889-01-0-1
3	Locking plate	100	6-30959-00-0-1
	alternatively for + 0,7 mm gasket pressure Locking plate	100	6-30959-01-0-1
1	Locking plate for inactive sash	100	6-30961-00-0-1
	alternatively for + 1,5 mm gasket pressure Locking plate for inactive sash	100	G-19658-02-0-1

Quantity G H I	Description	PU	Article No.
1	Bag of locking parts IS JET AK 8 with interior gear Contents	10	K-15810-00-0-1
	1 Inactive sash gear		6-24680-00-0-1
	1 Key		6-23903-38-0-0
	1 Shoot bolt		G-17509-00-0-1
	1 Shoot bolt		E-12832-00-0-1
	1 Keeper		G-12096-00-0-1
	1 Wedge for sash		9-40404-00-0-1
2	Locking plate for inactive sash	100	6-30961-00-0-1

Quantity G H I	Description	PU	Article No.
1	Bag of shoot bolt IS JET AK 8 Contents	10	K-15804-30-0-1
	2 Shoot bolts		E-12832-00-0-1
	2 Keepers		G-12096-00-0-1
	2 Carrier screws L 30		9-40884-30-0-8
	1 Wedge for sash		9-40404-00-0-1
2	Locking plate for inactive sash	100	6-30961-00-0-1

- [1] Middle lock from SW 1200 mm
[2] Groove depth max. 3,9 mm or groove width max. 13 mm
[3] Groove depth 4,0 to 5,1 mm

Working drawing 0-44231

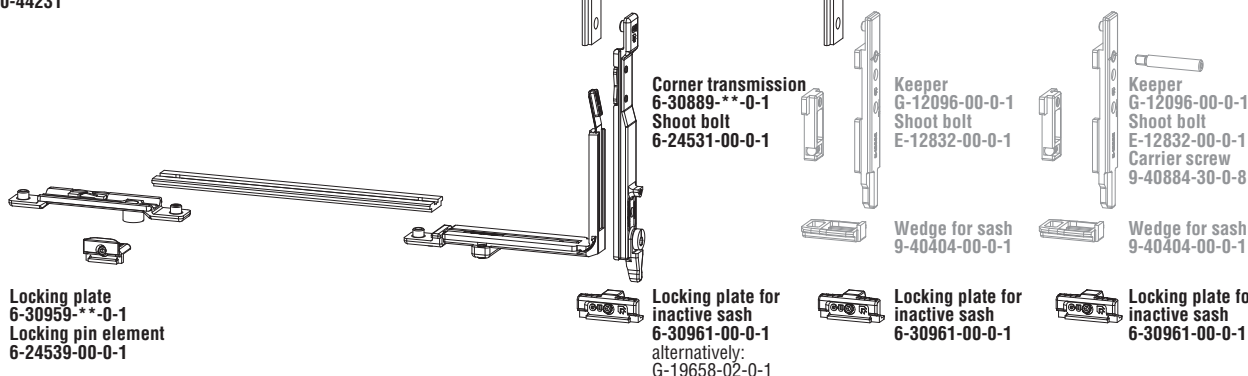

Locking plate
6-30959-**-0-1
Locking pin element
6-24539-00-0-1

Locking plate for
inactive sash
6-30961-00-0-1
alternatively:
G-19658-02-0-1

Locking plate for
inactive sash
6-30961-00-0-1

Locking plate for
inactive sash
6-30961-00-0-1

Windows and patio doors with rebate shoot bolt or shoot bolts – false mullion profile with double groove




Fitting requirements for schemes G and I

Quantity G	Description	PU	Article No.
1	Bag of locking parts IS JET AK 8 with rebate shoot bolt Contents	10	K-15803-00-0-1
	1 Rebate shoot bolt		6-31015-00-0-1
	2 Shoot bolts		6-31038-00-0-1
	1 Wedge for sash		9-40404-00-0-1
2	Push rod L = 1600 mm	1	9-40859-16-0-1
2	Locking plate for inactive sash	100	6-30961-00-0-1
	alternatively for increased pressure		
	Locking plate + 1,5 mm	100	G-19658-02-0-1
	Locking plate + 3,0 mm	100	G-19658-03-0-1

Quantity G	Description	PU	Article No.
2	Box of slide IS JET AK 8 for shoot bolt JET AK 8 Contents	50	K-15816-00-0-1
	1 Slide		9-41514-00-0-1
	1 Stop for slide		6-31726-00-0-1
1	Bag of shoot rods IS JET AK 8 for slides JET AK 8 Contents	20	K-15818-00-0-1
	1 Shoot rod 125 mm		9-41479-12-0-1
	1 Shoot rod 400 mm		9-41479-40-0-1
2	Locking plate for inactive sash	100	6-30961-00-0-1
	alternatively for increased gasket pressure		
	Locking plate + 1,5 mm	100	G-19658-02-0-1
	Locking plate + 3,0 mm	100	G-19658-03-0-1

Working drawing 0-44231

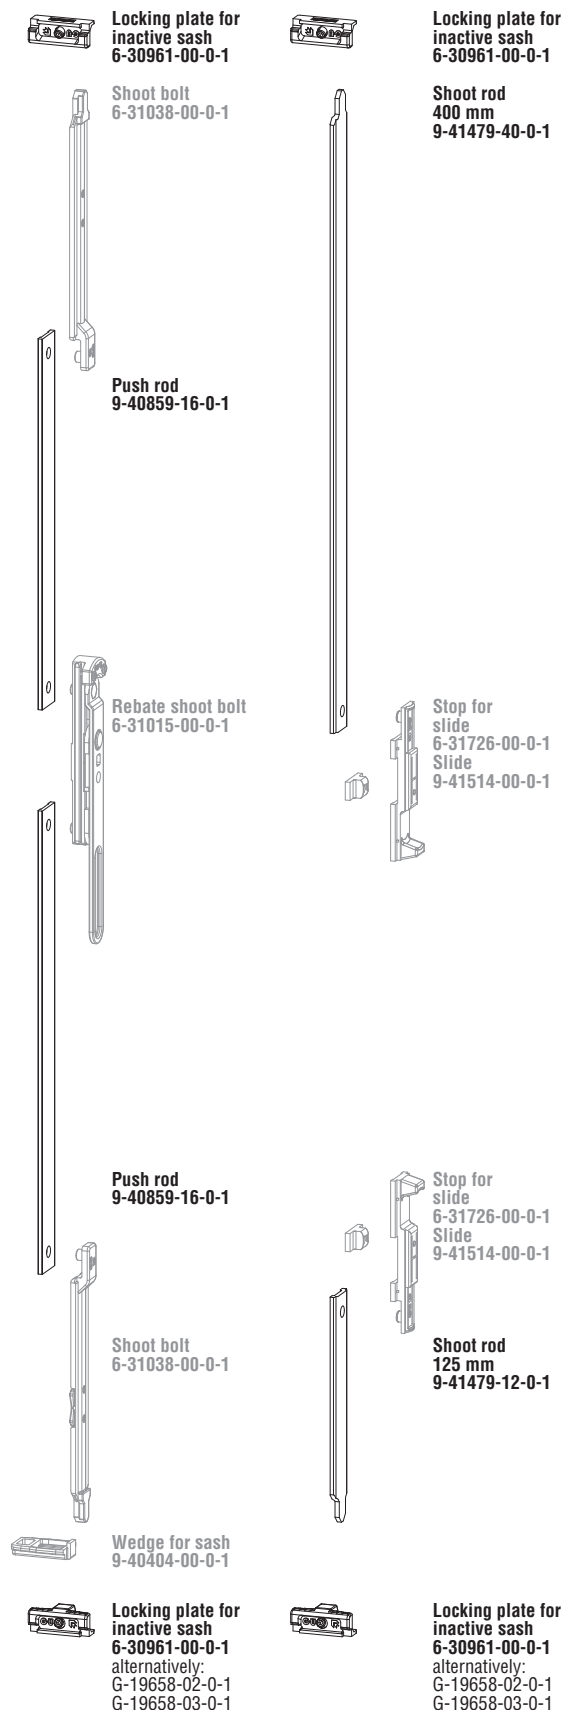

Windows and patio doors with shoot bolts – false mullion profile with double groove
 Frame groove 14/18



Fitting requirements for schemes I

Quantity	Description	PU	Article No.
1			
2	Box of slide IS JET AK 8 for shoot bolt JET AK 8 Contents	50	K-15816-00-0-1
	1 Slide		9-41514-00-0-1
	1 Stop for slide		6-31726-00-0-1
	1 Connecting piece		9-41529-00-0-1
2	Box of shoot bolt Contents	50	K-15817-00-0-1
	1 Shoot bolt		6-31727-00-0-1
	1 Eccentric cover		9-41515-00-0-1
2	Box of bolt locking plate 14/18 Contents	100	K-15819-00-0-1
	1 Bolt locking plate		9-41516-00-0-1
	1 Groove piece		9-41517-00-0-1
	1 Lens head countersunk screw M 5 x 10		9-13369-10-R-1

Working drawing 0-44231

