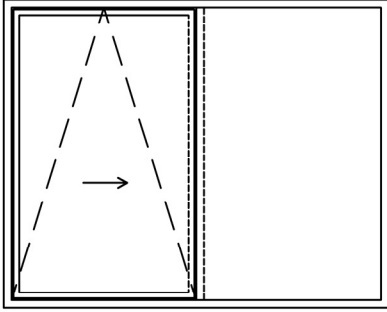









**SÜRME+VASİSTAS PENCERE-KAPIYA AİT BİLGİLER**


KANAT GENİŞLİĞİ(KG): MIN 700-1650 mm.

KANAT YÜKSEKLİĞİ(KY): MIN 850-2400 mm.

KANAT AĞIRLIĞI: MAX 150 kg.

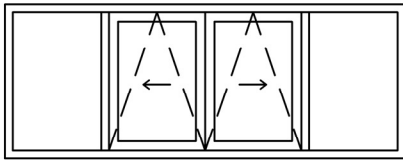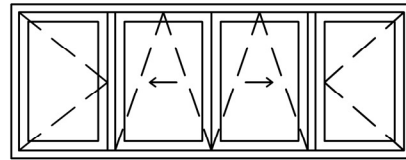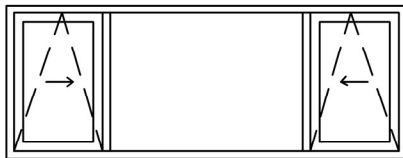
MEKANİZMA RENK: NATUREL ELOKSAL

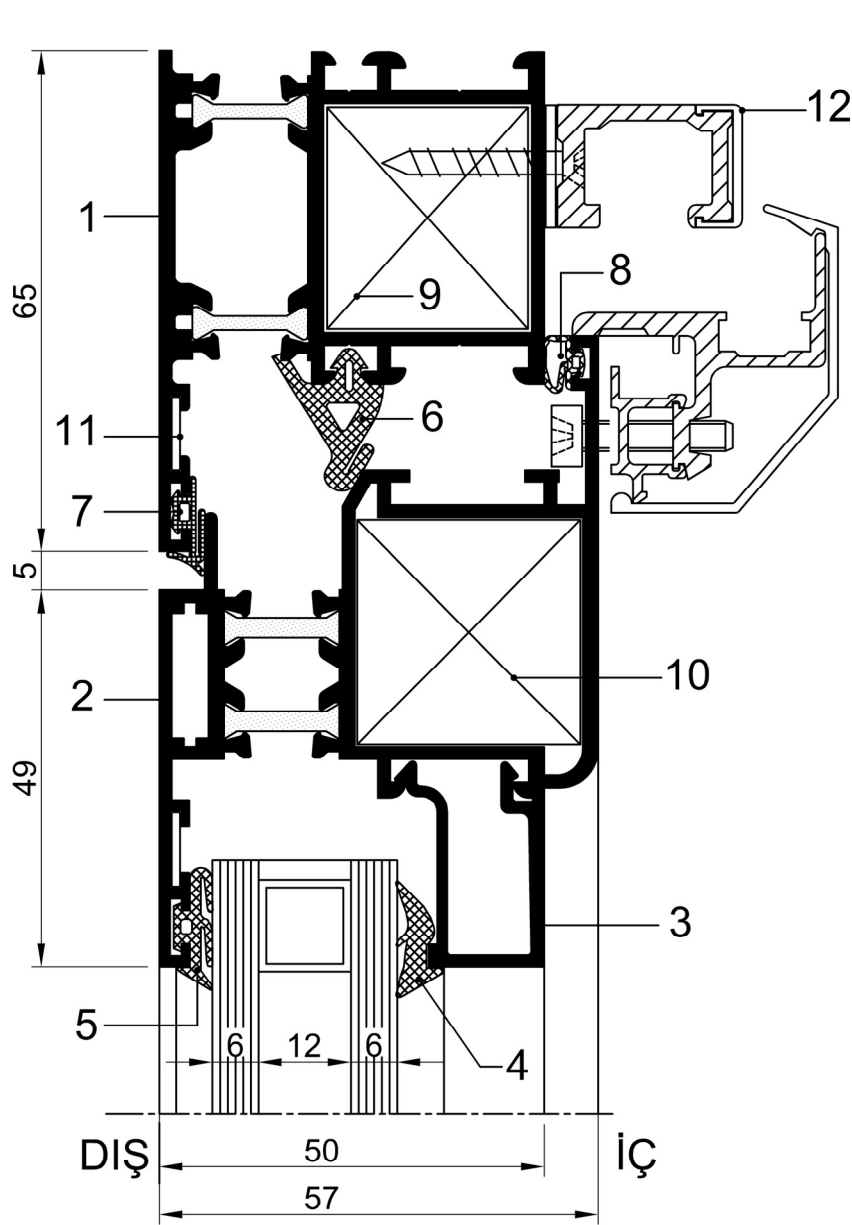UYGULAMA TİPLERİ**TİP A****TİP A1****TİP B****TİP B1****TİP C****TİP C1****TİP D**



3 DETAYI

1. Kasa Profili	50 E 25	7. Bini Fitili	40 D 08
2. Kanat Profili	50 E 28	8. Bini Fitili	F04 003
3. Cam Çıta Profili	3108	9. Köşe Takoza	3098
4. Cam Fitili	40 D 05	10. Köşe Takoza	3098
5. Cam Fitili	40 D 02	11. Köşe Gönyesi (Küçük)	40 D 21
6. Takoza Fitili	50 D 23	12. Sürme Vasistas Mekanizması	

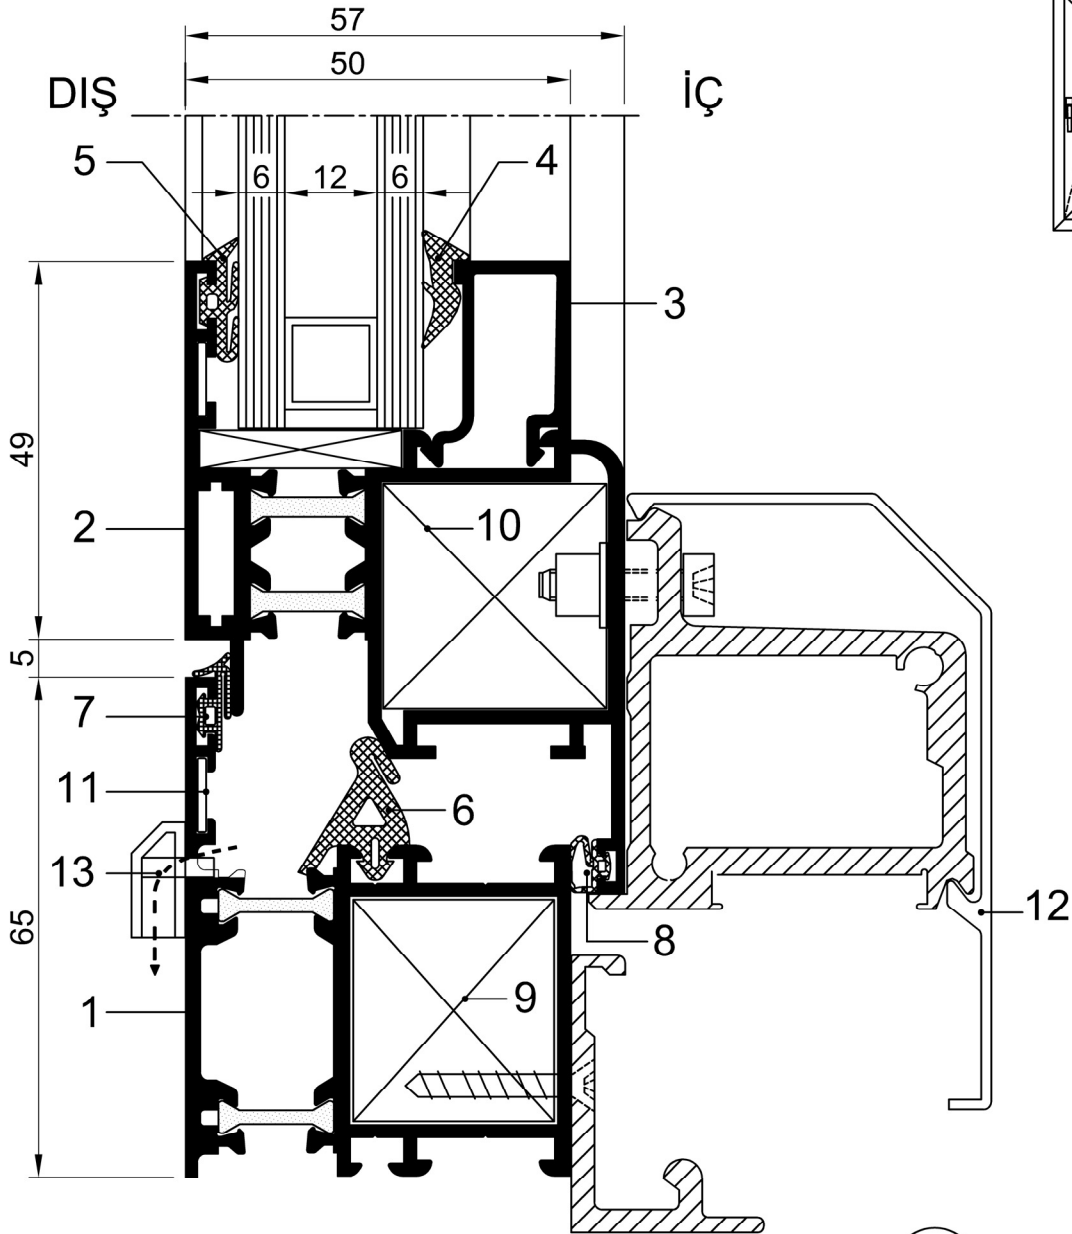

4 DETAYI

1. Kasa Profili	50 E 25	8. Bini Fitili	F04 003
2. Kanat Profili	50 E 28	9. Köşe Takoğu	3098
3. Cam Çita Profili	3108	10. Köşe Takoğu	3098
4. Cam Fitili	40 D 05	11. Köşe Gönyesi (Küçük)	40 D 21
5. Cam Fitili	40 D 02	12. Sürme Mekanizması	
6. Takoğu Fitili	50 D 23	13. Yağmur Tahliye Kapağı	40 D 13
7. Bini Fitili	40 D 08		