


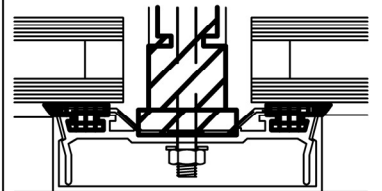


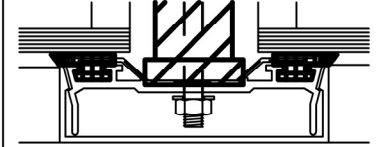



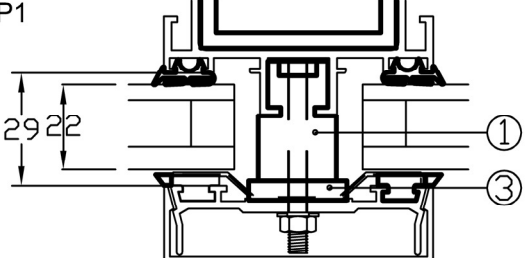

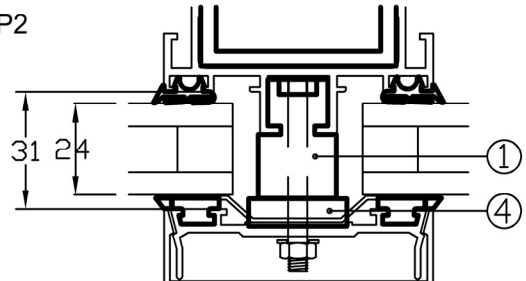

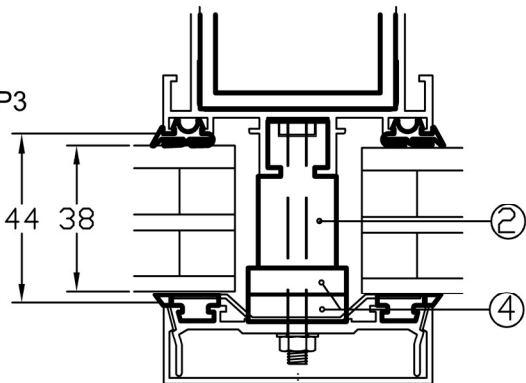




AKSESUAR ŞEKLİ	AKSESUAR KOD NO	KULLANILAN YER
	2037 CAM FİTİLİ (150 mt/koli)	
	40 D 46 OMEGA FİTİLİ (150 mt/pk)	
	50 D 51 SL-FT-20 SILIKON FİTİL (mt)	
	40 D 59 PIB FOLYOSUZ BANT 50x3 (mt)	
	40 D 56 ALUMINYUM FOLYO BANT 50x1 (mt)	
	40 D 26 U PLASTIGI 47x24 (3 mt)	

AKSESUAR ŞEKLİ	AKSESUAR KOD NO	KULLANILAN YER
① 	40 D 50 GIYDIRME CEPHE TAKOZU 19 mm (PLS) (50 adet/koli)	TIP1 
② 	40 D 51 GIYDIRME CEPHE TAKOZU 26 mm (PLS) (50 adet/koli)	TIP2 
③ 	40 D 48 GIYDIRME CEPHE LAMASI 5 mm (PLS) (50 adet/koli)	TIP3 
④ 	40 D 49 GIYDIRME CEPHE LAMASI 7 mm (PLS) (50 adet/koli)	PLASTİK TAKOZ BİRLİKTE KULLANILAN VIDALAR: M6x45-A2 (22-24 MM'LİK CAM İCİN) HİÇ PLASTİK LAMA KULLANMAMAK VEYA BİRKACINI KULLANMAK KAYDIYLA DEĞİŞİK CAM KOMBİNASYONLARI UYGULANABİLİR.
	IZO 67 KANAT ADAPTASYON PLASTIĞI (10 adet/koli)	AC 70 SİSTEMDE IZO 67 PENCERE SİSTEMİ UYGULANMAK İSTENDİĞİNDE KANADIN GENİSLİĞİNE GÖRE 30-40-50 cm'DE BİR TAKILIR. 